


**For Use With Fire Hose Rack Assembly & Fire Extinguisher & Fire Dept Valve**

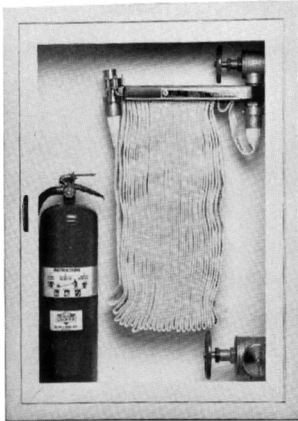

1400 Series

Series 1400 cabinets will accommodate a single 1 1/2" or 2 1/2" Fire Hose Rack assembly and 2 1/2" Fire Dept Valve with Cap and Chain and a portable Fire Extinguisher.

**STANDARD EQUIPMENT**

- \* Heavy gauge steel construction tub, door and trim
- \* White powder coat finish
- \* Continuous steel piano hinge
- \* Pull handle with roller catch

**CABINET OPTIONS**

- \* Prefix **FR** for Fire Rated Cabinet
- \* Suffix **AL** for clear anodized aluminum door and frame
- \* Suffix **SS** for Stainless Steel # 4 finish door and frame
- \* Suffix **FF** for Detention Grade Heavy Steel Door And Trim
- \* Door Styles See page 2-5
- \* Other cabinet options See page 2-7, 2-19 and 2-20

**ORDERING PROCEDURE**

- \* Select cabinet Figure No.
- \* Select door style
- \* Select type of hose rack assembly (Refer to Section 3000)
- \* Select Fire Extinguisher (Refer to Section 4000) (maximum sizes are 2 1/2 gallon water, 15 1/2 lb. Halotron, 10 lb. Carbon dioxide or 10 lb. Dry Chemical)
- \* Select cabinet options

Fig. No.	Trim Style	Trim Pcj. Tp.	Valve Cap.	Hose Cap.	Inside box dimensions			Overall Outside dim		Knockout locations				Wall Opening Required			FIRE RATED CABINETS Wall Opening Required FR Option		
					A	B	C	D	E	J	K	M	N	Width	Height	Depth	Width	Height	Depth
1400	Recessed	3/8"		100'	32 3/4	34 3/4	8	36 1/8	38 1/8	4	2 1/2	4	4	33 3/4	35 3/4	7 3/4	35	36 7/8	8 5/8
1401	Semi-recessed	1 1/4"	11/2"	Poly	32 3/4	34 3/4	8	36 1/8	38 1/8	4	2 1/2	4	4	33 3/4	35 3/4	6 7/8	35	36 7/8	7 3/4
1402	recessed	2 1/2"	or	75'	32 3/4	34 3/4	8	36 1/8	38 1/8	4	2 1/2	4	4	33 3/4	35 3/4	5 5/8	35	36 7/8	6 1/2
1406	Trimless		2 1/2"	SJRL	32 3/4	34 3/4	8	33	35	4	4	4	4	33 1/4	35 1/4	8 1/4			
1408	Surface			Hose	35 15/16	37 15/16	8 1/2	36 1/8	38 1/8	a	a	a	a						
1410	Recessed	3/8"		125'	32 3/4	38 3/4	8	36 1/8	42 1/8	4	2 1/2	4	4	33 3/4	39 3/4	7 3/4	35	40 7/8	8 5/8
1411	Semi-recessed	1 1/4"	11/2"	Poly	32 3/4	38 3/4	8	36 1/8	42 1/8	4	2 1/2	4	4	33 3/4	39 3/4	6 7/8	35	40 7/8	7 3/4
1412	recessed	2 1/2"	or	100'	32 3/4	38 3/4	8	36 1/8	42 1/8	4	2 1/2	4	4	33 3/4	39 3/4	5 5/8	35	40 7/8	6 1/2
1416	Trimless		2 1/2"	SJRL	32 3/4	38 3/4	8	33	39	4	4	4	4	33 1/4	39 1/4	8 1/4			
1418	Surface			Hose	35 15/16	41 15/16	8 1/2	36 1/8	42 1/8	a	a	a	a						

a- No knockouts provided unless specified on surface mounted cabinets  
 Note: Add 5/8" to depth of wall opening required for cabinets with aluminum frame  
 9" Tub option available upon request on 1400 and 1410 Series  
 NOTE: FIRE RATED CABINETS HAVE NO KNOCKOUTS

