


LOBBY STORAGE ASSEMBLY

Designed to conform to NYC Building Code Occupancy Group J-2 requirements.

STANDARD EQUIPMENT: Heavy gauge steel construction tub, door and trim. White powder coat finish. Solid panel "E" style door with lock and key. Built-in storage shelf.

2190 Series

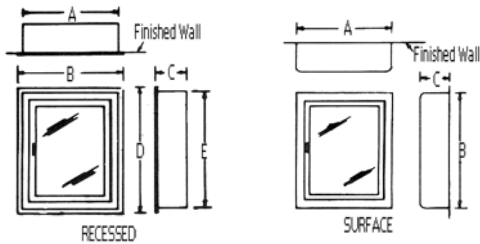

All Series **Recessed** cabinets are two-piece construction with adjustable screws for attachment of door and frame to tub. Pull handle with roller catch and continuous hinge with brass pin are standard hardware.


NOTE: Surface cabinets are one-piece construction.

Diagrams of Lobby Storage Cabinets

FIGURE NO.	INSTALLATION STYLE	TRIM PROJ. TP	INSIDE BOX DIMENSIONS			OVERALL OUTSIDE DIMENSIONS		WALL OPENING REQUIRED		
			A	B	C	D	E	WIDTH	HEIGHT	DEPTH
2190	Recessed	5/16"	24 3/4	38 3/4	8	27 3/8	42 1/8	25	39 3/4	7 3/4
2198	Surface		27 3/16	41 15/16	8 1/2	-	-	-	-	-

All dimensions in inches unless otherwise specified

Required contents to conform with NYC R-2 requirements:



2920 Series

- 375' Figure No. **3401** 1 1/2" Lined Fire Hose
- (8) **3440** 1 1/2" Cast Brass Couplings
- (3) **3486** 1 1/2" X 15 X 5/8" Cast Iron Nozzles
- (2) **7245** 2 1/2" X 1 1/2" Cast Brass Reducers
- (2) **7107** 1 1/2" Common Spanner Wrench
- (2) **7109** 2 1/2" Common Spanner Wrench

KEY STORAGE CABINET

Fabricated steel cabinet with white powder finish. Solid door with NYFD Lock. Continuous Hinged Door.



2928 Series

FIGURE NO.	INSTALLATION STYLE	TRIM PROJ. TP	INSIDE BOX DIMENSIONS			OVERALL OUTSIDE DIMENSIONS		WALL OPENING REQUIRED		
			A	B	C	D	E	WIDTH	HEIGHT	DEPTH
2920	Recessed	7/16	5 1/4	5 1/4	2 11/16	7 3/8	7 3/8	5 3/4	5 3/4	3
2928	Surface		5 1/4	5 1/4	2 11/16	5 11/16	5 11/16	-	-	-