


**CONTINUOUS FLOW REELS
FOR INDUSTRIAL FIRE PROTECTION**



Figure No. 7091-7102

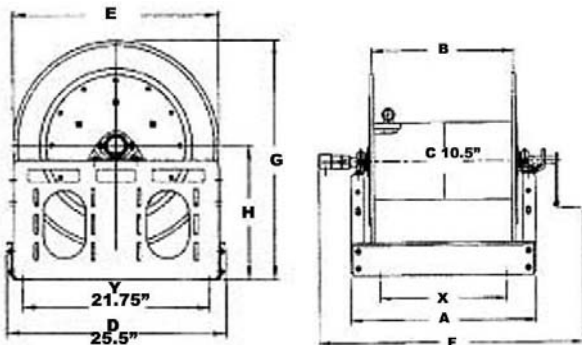

To handle 3/4" I.D. thru 1-1/2" I.D. hose.

- * The reel can be installed on the floor or wall.
- * Steel construction is standard. Aluminum or stainless steel construction is available as an option.
- * Supplied with spring actuated pinlock.

Series 7091-7102

- * Standard inlet 1" 90 degree ball bearing swivel joint with 1" female NPT threads.
- * Standard outlet 1" male NST threads (1.375" x 8 threads per inch).
- * Pressures to 1000 psi (69 bar).
- * Temperatures from -60 degrees F to +225 degrees F (-51 degrees C to +121 degrees C).

- * Standard inlet 1-1/2" 90 ball bearing swivel joint with 1 1/2" female NPT threads and 2" victaulic groove.
- * Standard inlet 1-1/2" male NST threads (1.990" x 9 threads per inch).
- * Pressures to 600 psi (41 bar).
- * Temperatures from -20 degrees F to +225 degrees F (-29 degrees C to +107 degrees C).

Both Series

- * Call for other sizes and/or threads.
- * Removable Crank Rewind is standard.
- * Silver, Red, White, or Black painted finish. (Specify)

Removable crank rewind is standard with all series. Specify paint finish.

| Model No. | Hose Capacity Of Reel feet Round Hose | | | Approx. Wt. Crank Rewind lb. | | Reel Dimensions inches | | | | | | | |
|-----------|---------------------------------------|-----------------|-------------------|------------------------------|------|------------------------|------|------|-------|-------|-------|------|------|
| | I.D. (in.) O.D. (in.) | 3/4" 1-9/32" | 1" 1-9/16" | NET | SHIP | A | B | D | E | F | G | H | X |
| 7091 | | 100 | 50 | 85 | 120 | 13 | 7.5 | 25.5 | 24 | 24.75 | 27.88 | 15.5 | 5 |
| 7092 | | 150 | 100 | 94 | 129 | 17 | 11.5 | 25.5 | 24 | 28.75 | 27.88 | 15.5 | 9 |
| 7093 | | 250 | 150 | 103 | 138 | 21 | 15.5 | 25.5 | 24 | 32.75 | 27.88 | 15.5 | 13 |
| 7094 | | 300 | 200 | 113 | 155 | 25.5 | 20 | 25.5 | 24 | 32.75 | 27.88 | 15.5 | 17.5 |
| Model No. | Hose Capacity Of Reel feet Round Hose | | | Approx. Wt. Crank Rewind lb. | | Reel Dimensions inches | | | | | | | |
| | I.D. (in.) O.D. (in.) | 1" 1-9/16" | 1-1/2" 2-1/16" | NET | SHIP | A | B | D | E | F | G | H | X |
| 7095 | | 50 | - | 95 | 130 | 13 | 7.5 | 25.5 | 24 | 26 | 27.88 | 15.5 | 5 |
| 7096 | | 100 | 50 | 104 | 139 | 17 | 11.5 | 25.5 | 24 | 30 | 27.88 | 15.5 | 9 |
| 7097 | | 150 | 75 | 113 | 148 | 21 | 15.5 | 25.5 | 24 | 34 | 27.88 | 15.5 | 13 |
| 7098 | | 200 | 100 | 123 | 173 | 25.5 | 20 | 25.5 | 24 | 38.5 | 27.88 | 15.5 | 17.5 |
| 7099 | | 200 | 100 | 124 | 174 | 21 | 15.5 | 25.5 | 30 | 34 | 30.38 | 16 | 13 |
| 7100 | | 275 | 150 | 134 | 184 | 25.5 | 20 | 25.5 | 30 | 38.5 | 30.38 | 16 | 17.5 |
| 7101 | | 375 | 200 | 147 | 197 | 31.5 | 26 | 25.5 | 30 | 44.5 | 30.38 | 16 | 23.5 |
| 7102 | | 400 | 250 | 138 | 188 | 27.5 | 22 | 25.5 | 31.75 | 40.5 | 32.38 | 16.5 | 19.5 |

* Non-Collapsible rubber hose shown on Page 7-4