


CONTINUOUS FLOW REELS
FOR INDUSTRIAL FIRE PROTECTION



Figure No. 7091-7102

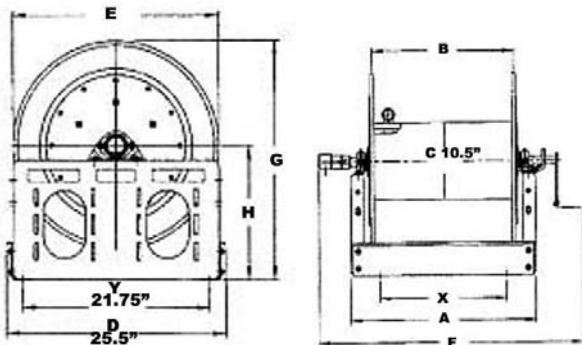

To handle 3/4" I.D. thru 1-1/2" I.D. hose.

- * The reel can be installed on the floor or wall.
- * Steel construction is standard. Aluminum or stainless steel construction is available as an option.
- * Supplied with spring actuated pinlock.

Series 7091-7102

- * Standard inlet 1" 90 degree ball bearing swivel joint with 1" female NPT threads.
- * Standard outlet 1" male NST threads (1.375" x 8 threads per inch).
- * Pressures to 1000 psi (69 bar).
- * Temperatures from -60 degrees F to +225 degrees F (-51 degrees C to +121 degrees C).

- * Standard inlet 1-1/2" 90 ball bearing swivel joint with 1 1/2" female NPT threads and 2" victaulic groove.
- * Standard outlet 1-1/2" male NST threads (1.990" x 9 threads per inch).
- * Pressures to 600 psi (41 bar).
- * Temperatures from -20 degrees F to +225 degrees F (-29 degrees C to +107 degrees C).

Both Series

- * Call for other sizes and/or threads.
- * Removable Crank Rewind is standard.
- * Silver, Red, White, or Black painted finish. (Specify)

Removable crank rewind is standard with all series. Specify paint finish.

Model No.	Hose Capacity Of Reel feet Round Hose			Approx. Wt. Crank Rewind lb.		Reel Dimensions inches							
	I.D. (in.) O.D. (in.)	3/4" 1-9/32"	1" 1-9/16"	NET	SHIP	A	B	D	E	F	G	H	X
7091		100	50	85	120	13	7.5	25.5	24	24.75	27.88	15.5	5
7092		150	100	94	129	17	11.5	25.5	24	28.75	27.88	15.5	9
7093		250	150	103	138	21	15.5	25.5	24	32.75	27.88	15.5	13
7094		300	200	113	155	25.5	20	25.5	24	32.75	27.88	15.5	17.5
Model No.	Hose Capacity Of Reel feet Round Hose			Approx. Wt. Crank Rewind lb.		Reel Dimensions inches							
	I.D. (in.) O.D. (in.)	1" 1-9/16"	1-1/2" 2-1/16"	NET	SHIP	A	B	D	E	F	G	H	X
7095		50	-	95	130	13	7.5	25.5	24	26	27.88	15.5	5
7096		100	50	104	139	17	11.5	25.5	24	30	27.88	15.5	9
7097		150	75	113	148	21	15.5	25.5	24	34	27.88	15.5	13
7098		200	100	123	173	25.5	20	25.5	24	38.5	27.88	15.5	17.5
7099		200	100	124	174	21	15.5	25.5	30	34	30.38	16	13
7100		275	150	134	184	25.5	20	25.5	30	38.5	30.38	16	17.5
7101		375	200	147	197	31.5	26	25.5	30	44.5	30.38	16	23.5
7102		400	250	138	188	27.5	22	25.5	31.75	40.5	32.38	16.5	19.5

* Non-Collapsible rubber hose shown on Page 7-4