

WHEEL OPERATED MONITOR



Figure No. 9012

Figure No. 9012-9013

Fixed installed for one man operation where high gallonages are required. Intended for permanent, stationery protection in high risk areas.

STANDARD EQUIPMENT: Handwheel driven worm gear fully enclosed and protected from the elements. Stainless steel worm. Full 360 degree rotation. **NOZZLE NOT INCLUDED. SEE PAGE 9-6.**



Figure No. 9013

Fig. No.	Operated	Material	G.P.M.	Outlet	Base Options
9012	Single Wheel	Brass	1250	2 1/2"	3" NPT FE - 3", 4" 150lb. ANSI Flange
9013	Double Wheel	Aluminum	2000	3 1/2 "	3" 150lb. ANSI Flange 4" 150lb. ANSI Flange

WHEEL OPERATED MONITOR

Factory Mutual Approved

Figure No. 9018-9020-9022

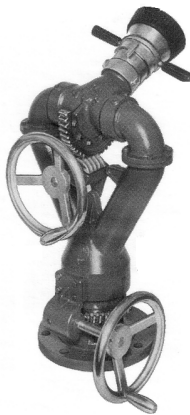


Figure No. 9020

Fixed installed for one man operation where high gallonages are required. Intended for permanent, stationery protection in high risk areas.

STANDARD EQUIPMENT: All brass construction with stainless steel and brass twist locking mechanism. Grease fittings on lower swivels. Red enamel finish. Full 360 degree horizontal traverse. **NOZZLE NOT INCLUDED. SEE PAGE 9-6.**

Fig. No.	Operated	Material	G.P.M.	Outlet	Base Options
9018	Single Wheel	Brass	750	2 1/2"	2 1/2", 3", 4" Female NPT Flange 125-150 AZA 2 1/2" 3", 4", 6" Flange 250-300ASA 2 1/2", 3" 4"
9020	Double Wheel	Brass	1100	2 1/2"	3" or 4" Female NPT 2 1/2", 3", 4" or 6"-- 150# ANSI Flange 3", 4" or 6" 300 ANSI Flange